



RECOMMENDATIONS FOR USE

MAINTENANCE INTERVALS

It is recommended that you change your filter, along with the pre-filter, once a year*.

It's better to change a filter than a bank of fuel injectors!

USAGE PRECAUTIONS

- ! If the filter is not packaged, store it upside down to prevent dust from falling into it
- ! Always handle by the tank
- ! Lightly oil the joint for ease of tightening

*Duration generally observed, please refer to your vehicle maintenance manual or the filter booklet for more information.

Did you know?

A new filter can contain metal residues left over from the manufacturing process. These residues can cause irreversible damage to your fuel injection system. For this reason, Iveco produces certain key components in a **controlled environment**, and in addition, **washes** some of these to ensure the best performance of your new filter.



Controlled environment site



WWW.IVECO.COM



IVECO MAKES THE DIFFERENCE. LET'S SEE HOW.




ORIGINAL FUEL FILTER
GET THE BEST OUT OF YOUR VEHICLE

IVECO
BUS



THE KEY ROLE PLAYED BY THE FUEL FILTER

With the increasing prevalence of "common rail" * systems, the quality of diesel fuel filtration is essential for the **protection and performance of the injection system**. Iveco fuel filters are designed specifically for your engine, and ensure the cleanliness of the fuel, removing four types of contaminants:

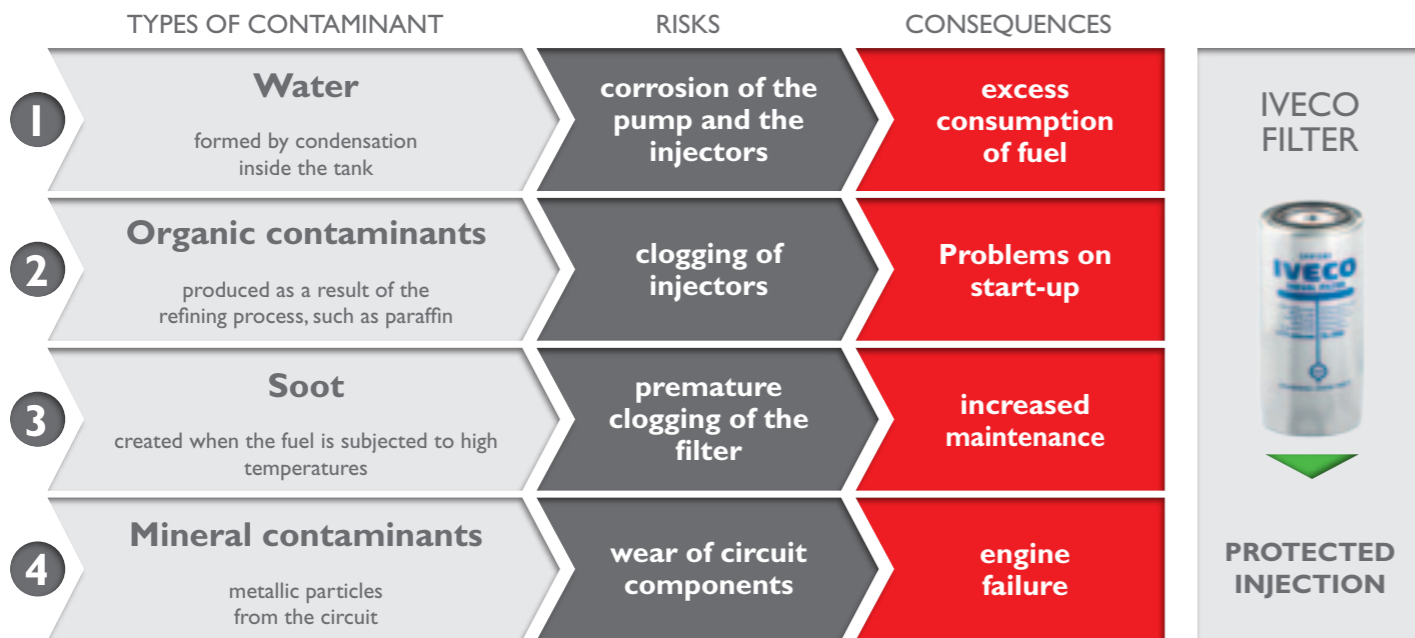


*Fuel injector bank

THE FILTERING MATERIAL: A HIGH-TECHNOLOGY ELEMENT



To ensure that these 3 properties are present, the quality of the filtering element is crucial. Iveco uses a **multi-layer filtering material** which stops the majority of particles of all sizes.

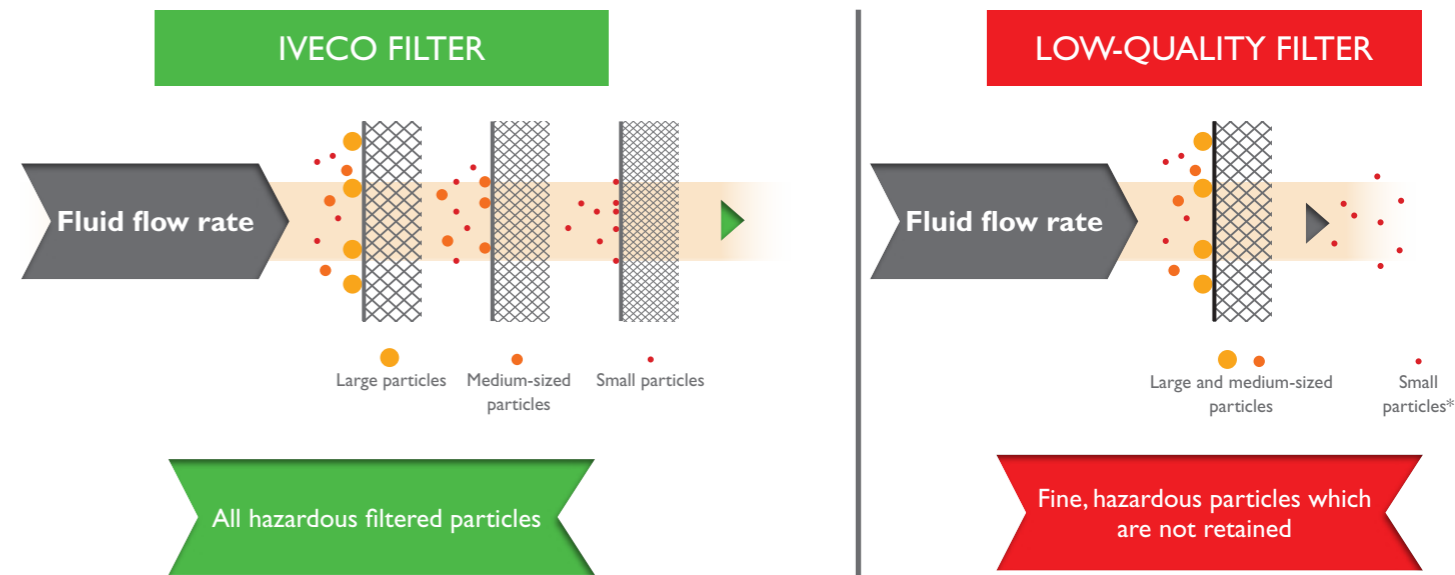


* Particles which lead to premature engine wear.



WHY CHOOSE AN IVECO ORIGINAL FILTER?

ESSENTIAL PROPERTIES OF THE FILTER
Iveco original fuel filters boast three complementary properties:

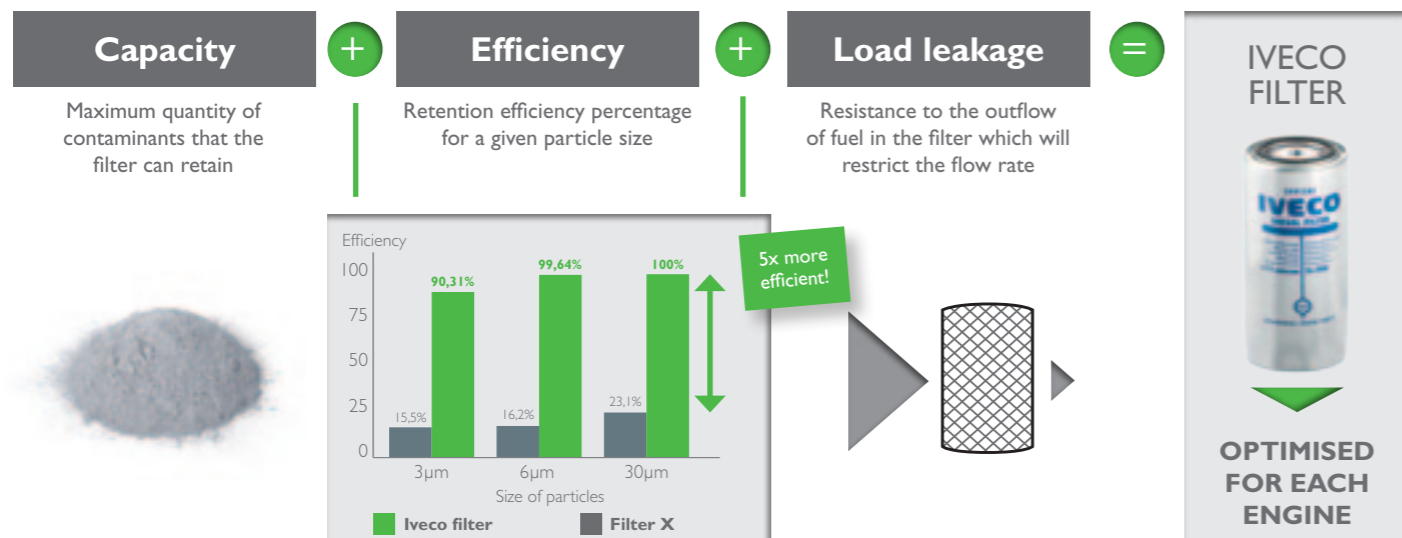

These three characteristics must be combined in just the right measure, so that the fuel circulates and stays clean over time. Only original replacement parts can guarantee optimum filtration for your specific usage needs.

THE STRUCTURE : THE DIFFERENCE IS ON THE INSIDE

Iveco chooses materials that can withstand extreme temperature, vibrations and pressure. These conditions, which are subjected to dynamic pressure tests* in the laboratory, allow us to validate the quality of our products.



*Test conducted at a frequency of 10 Hz with pressures varying from 0 to 12 bar, equal to a pressure of 12 kg /cm2 applied every second.